

SCHWILLE ELEKTRONIK GMBH EMV LABOR

MESSUNG DER ELEKTRISCHEN FELDSTÄRKE

EUT: Pandora
 Manuf: OpenPandora GmbH
 Op Cond:
 Operator: Manfred Schiedrich
 Test Spec: Antenne H/ 0°/ 10 m
 Comment: Minifilesystem


File: 1410ef4.dat : New Measurement

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
30MHz	1GHz	60kHz	120kHz	PK	2msec	0 dB	60dB

Transducer	No.	Start	Stop	Name
	22	20MHz	1GHz	CBL6111+

Final Measurement: X QP
 Meas Time: 1sec
 Subranges: 25
 Acc Margin: 6 dB

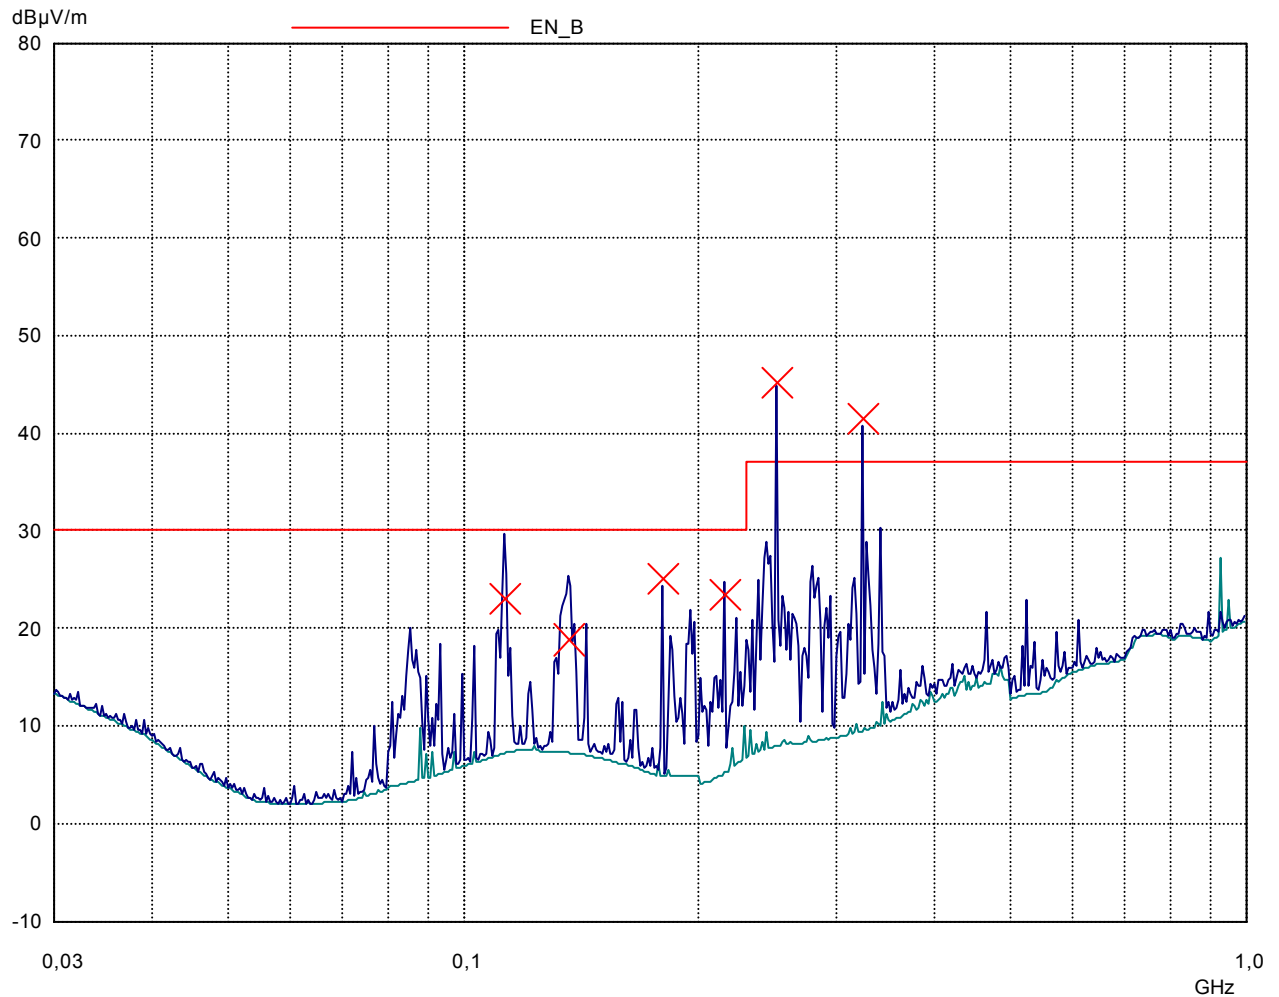

SCHWILLE ELEKTRONIK GMBH EMV LABOR

MESSUNG DER ELEKTRISCHEN FELDSTÄRKE

EUT: Pandora
 Manuf: OpenPandora GmbH
 Op Cond:
 Operator: Manfred Schiedrich
 Test Spec: Antenne H/ 0°/ 10 m
 Comment: Minifilesystem

File: 1410ef4.dat : New Measurement

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
30MHz	1GHz	60kHz	120kHz	PK	2msec	0 dB	60dB

Transducer	No.	Start	Stop	Name
	22	20MHz	1GHz	CBL6111+

Final Measurement: X QP
 Meas Time: 1sec
 Subranges: 25
 Acc Margin: 6 dB

Final Measurement Results:

Frequency GHz	QP Level dBµV/m	QP Limit dBµV/m	QP Delta dB	Ref. Offset dB
0,11304	23,06	30,00	6,94	-15,90
0,13626	18,82	30,00	11,18	-11,57
0,18	25,06	30,00	4,94	-20,28
0,21594	23,36	30,00	6,64	-18,27
0,252	45,20*	37,00	-8,20	-37,32
0,324	41,51*	37,00	-4,51	-32,04

* limit exceeded