

SCHWILLE ELEKTRONIK GMBH EMV LABOR

MESSUNG DER ELEKTRISCHEN FELDSTÄRKE

EUT: Pandora
 Manuf: OpenPandora GmbH
 Op Cond:
 Operator: Manfred Schiedrich
 Test Spec: Antenne V/ 0°/ 10 m
 Comment: Netzteil, USB Stick


File: 1410ef5.dat : New Measurement

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
30MHz	1GHz	60kHz	120kHz	PK	2msec	0 dB	60dB

Transducer	No.	Start	Stop	Name
	22	20MHz	1GHz	CBL6111+

Final Measurement: X QP
 Meas Time: 1sec
 Subranges: 25
 Acc Margin: 6 dB

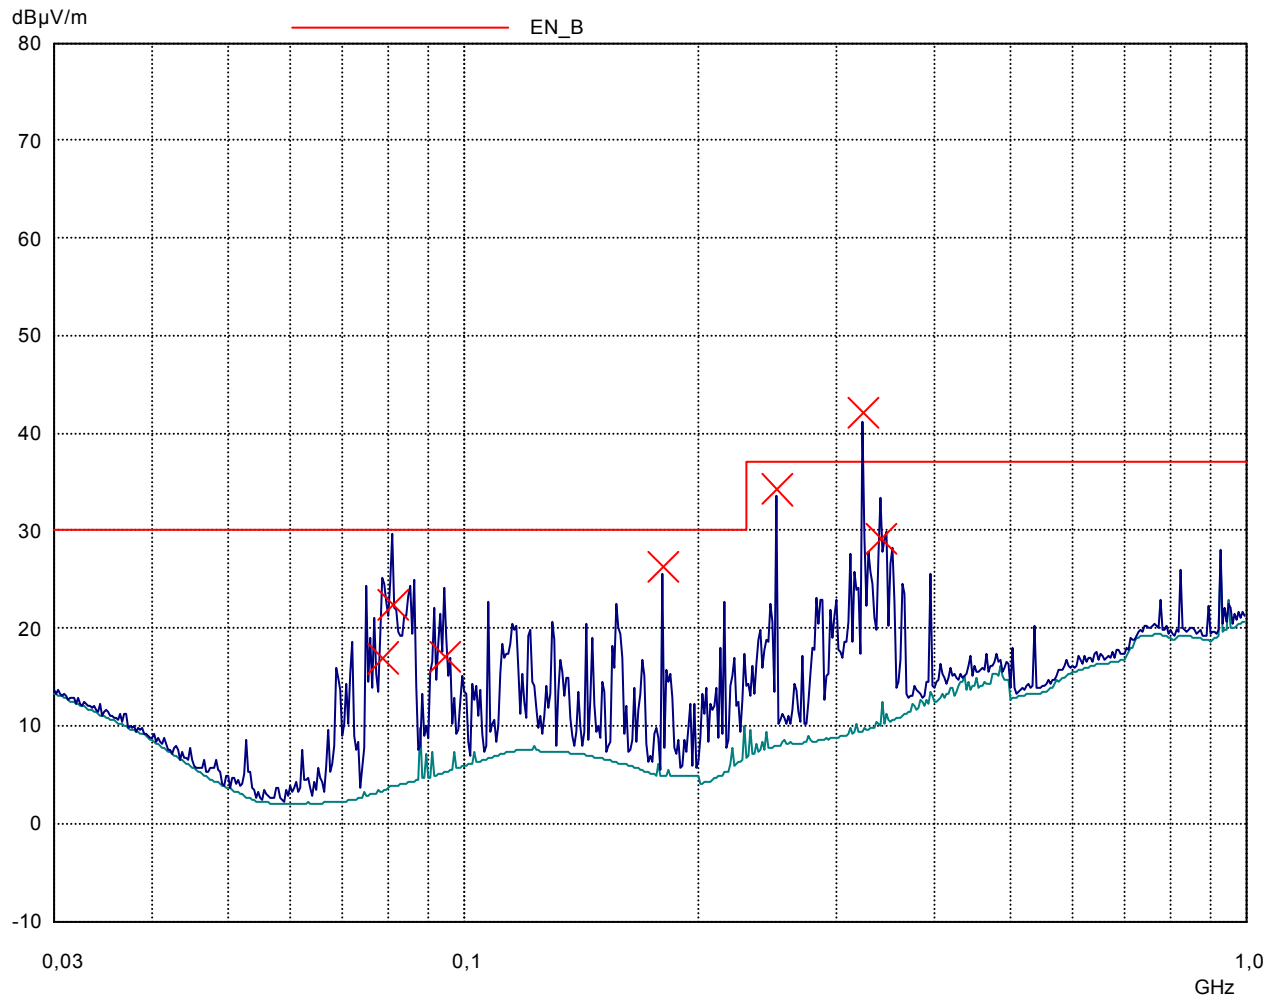

SCHWILLE ELEKTRONIK GMBH EMV LABOR

MESSUNG DER ELEKTRISCHEN FELDSTÄRKE

EUT: Pandora
 Manuf: OpenPandora GmbH
 Op Cond:
 Operator: Manfred Schiedrich
 Test Spec: Antenne V/ 0°/ 10 m
 Comment: Netzteil, USB Stick

File: 1410ef5.dat : New Measurement

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
30MHz	1GHz	60kHz	120kHz	PK	2msec	0 dB	60dB

Transducer	No.	Start	Stop	Name
	22	20MHz	1GHz	CBL6111+

Final Measurement: X QP
 Meas Time: 1sec
 Subranges: 25
 Acc Margin: 6 dB

Final Measurement Results:

Frequency GHz	QP Level dBµV/m	QP Limit dBµV/m	QP Delta dB	Ref. Offset dB
0,07872	16,96	30,00	13,04	-13,63
0,081	22,38	30,00	7,62	-18,61
0,09486	17,12	30,00	12,88	-11,88
0,18	26,25	30,00	3,75	-21,47
0,252	34,21	37,00	2,79	-26,33
0,324	42,09*	37,00	-5,09	-32,62
0,342	29,12	37,00	7,88	-19,10

* limit exceeded