

SCHWILLE ELEKTRONIK GMBH EMV LABOR

MESSUNG DER ELEKTRISCHEN FELDSTÄRKE

EUT: Pandora
 Manuf: OpenPandora GmbH
 Op Cond:
 Operator: Manfred Schiedrich
 Test Spec: Antenne H/ 0°/ 10 m
 Comment: Netzteil, USB Stick


File: 1410ef6.dat : New Measurement

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
30MHz	1GHz	60kHz	120kHz	PK	2msec	0 dB	60dB

Transducer	No.	Start	Stop	Name
	22	20MHz	1GHz	CBL6111+

Final Measurement: X QP
 Meas Time: 1sec
 Subranges: 25
 Acc Margin: 6 dB

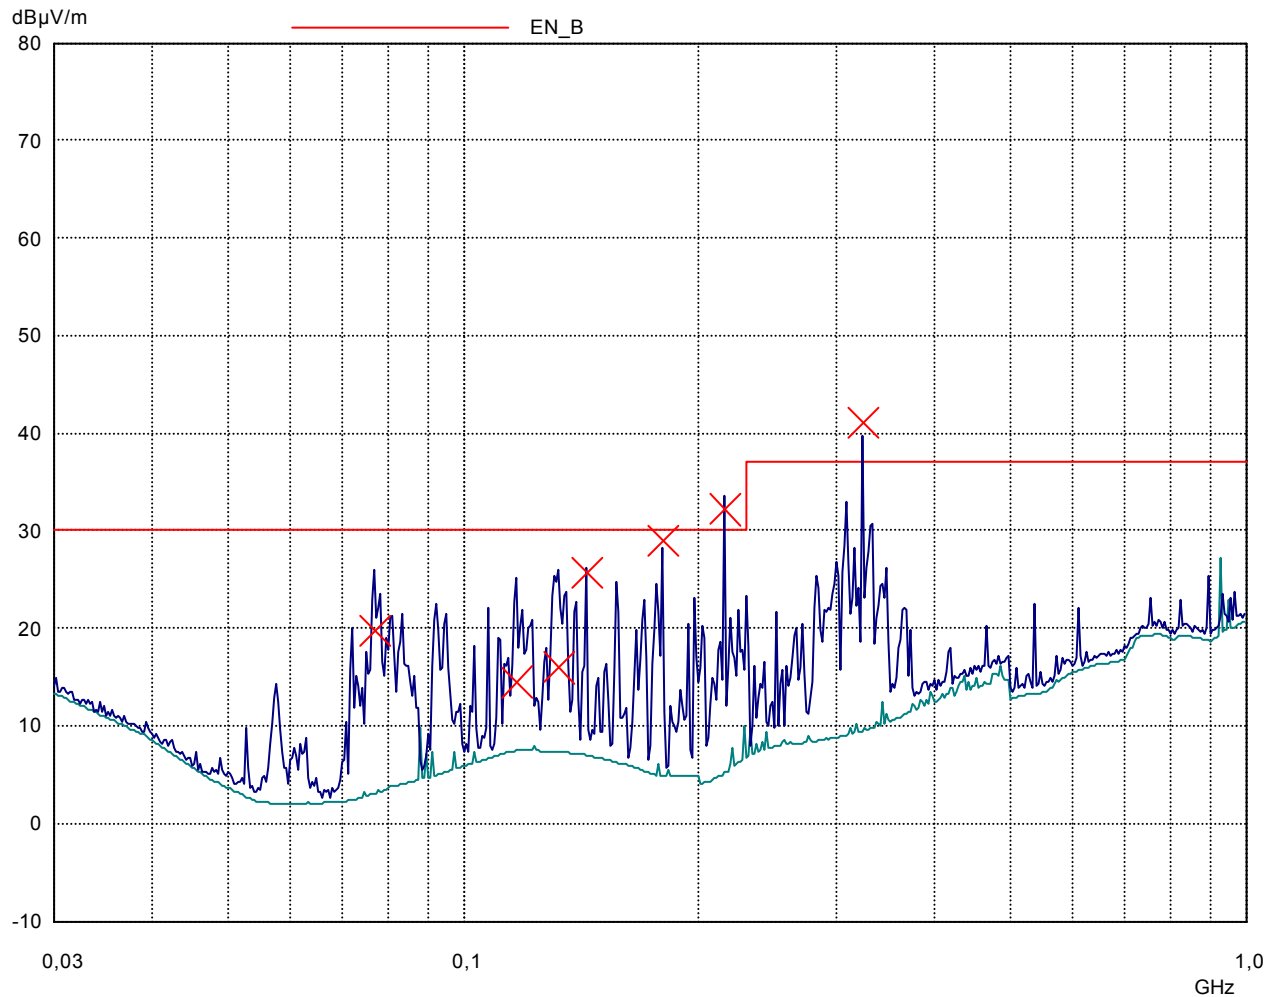

SCHWILLE ELEKTRONIK GMBH EMV LABOR

MESSUNG DER ELEKTRISCHEN FELDSTÄRKE

EUT: Pandora
 Manuf: OpenPandora GmbH
 Op Cond:
 Operator: Manfred Schiedrich
 Test Spec: Antenne H/ 0°/ 10 m
 Comment: Netzteil, USB Stick

File: 1410ef6.dat : New Measurement

Scan Settings (1 Range)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	OpRge
30MHz	1GHz	60kHz	120kHz	PK	2msec	0 dB	60dB

Transducer	No.	Start	Stop	Name
	22	20MHz	1GHz	CBL6111+

Final Measurement: X QP
 Meas Time: 1sec
 Subranges: 25
 Acc Margin: 6 dB

Final Measurement Results:

Frequency GHz	QP Level dBµV/m	QP Limit dBµV/m	QP Delta dB	Ref. Offset dB
0,07692	19,73	30,00	10,27	-16,70
0,11694	14,49	30,00	15,51	-7,04
0,13278	15,96	30,00	14,04	-8,63
0,144	25,74	30,00	4,26	-18,72
0,18	28,89	30,00	1,11	-24,11
0,216	32,15*	30,00	-2,15	-26,85
0,324	41,06*	37,00	-4,06	-31,59

* limit exceeded